

Datasheet

Optical Spectrum Analyzer (OSA) Modules

EM316OSA-40DC21



Features


- Full C-Band scanning coverage
 - 100GHz spacing
 - DWDM channels 21-60
- Separate channel data
 - Wavelength and frequency
 - Optical power
 - Optical signal-to-noise ratio (OSNR)
- Fiber Driver management compatibility
- Local USB interface for PC-based optical performance monitor application
- High reliability technology - no moving parts and GR-63/1209/1221 qualified
- Fiber Driver chassis compatibility
- Fiber optic (98%/2%) splitter cable (ordered separately)

Overview

The Optical Spectrum Analyzer (OSA) module complements the Fiber Driver® DWDM transport solution by providing real-time optical performance analysis for any DWDM aggregated optical link. The single-slot module operates as a standalone device or as a fully integrated and managed Fiber Driver system component.

The module provides the optical channel monitoring (OCM) functionality of an advanced Optical Spectrum Analyzer (OSA). The OSA monitors signal status and delivers precise optical performance information including wavelength, frequency, signal power, and estimated optical signal-to-noise ratio (OSNR) for each individual wavelength channel in an optically multiplexed C-Band DWDM link. These parameters are important for the proper evaluation, deployment, management, and maintenance of optical transports systems.


When integrated in a managed Fiber Driver system, the spectrum analysis information is accessible through the Fiber Driver network manager (LNXNM-OT). It provides secure local serial and remote Ethernet interfaces for complete management access to the OSA analysis data either in text-based windows or graphically through MRV's MegaVision Pro.

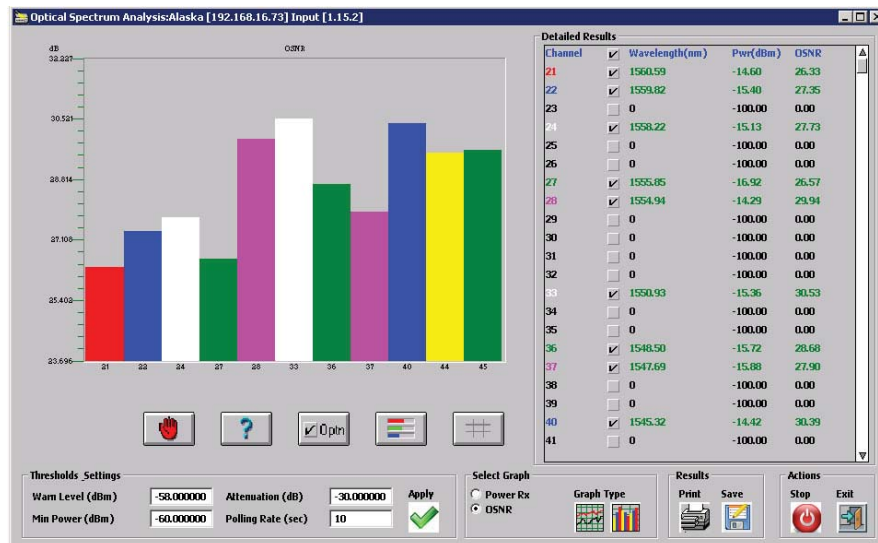


Datasheet

The 1-slot module can also connect to a PC application through a USB interface. The PC-based optical performance monitoring application monitors and graphically displays the same module information as through the management module.

Application Diagram 1

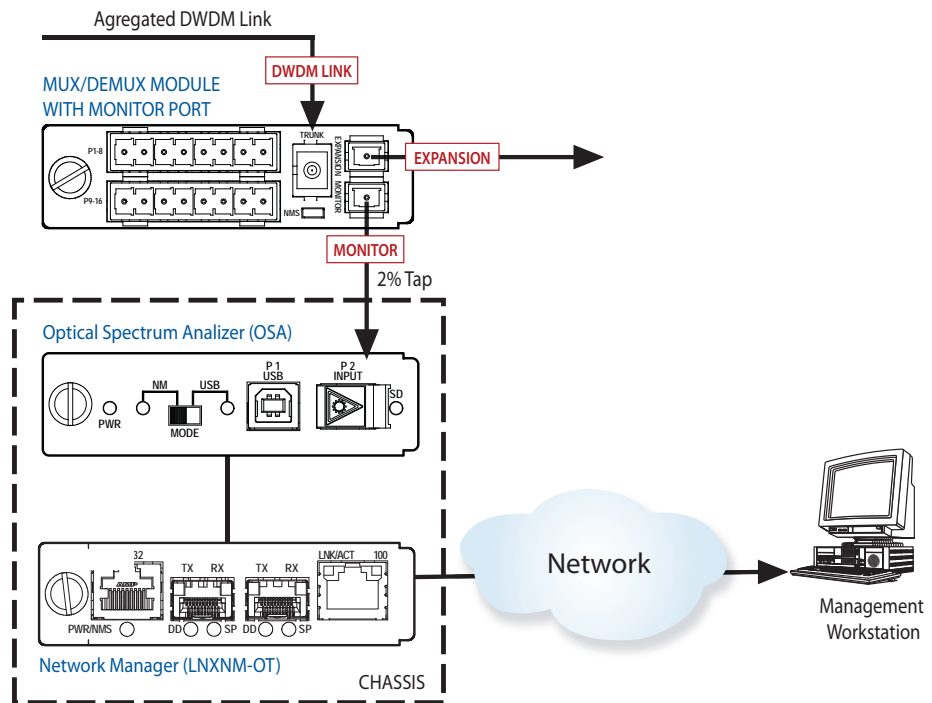

Application Diagram 2

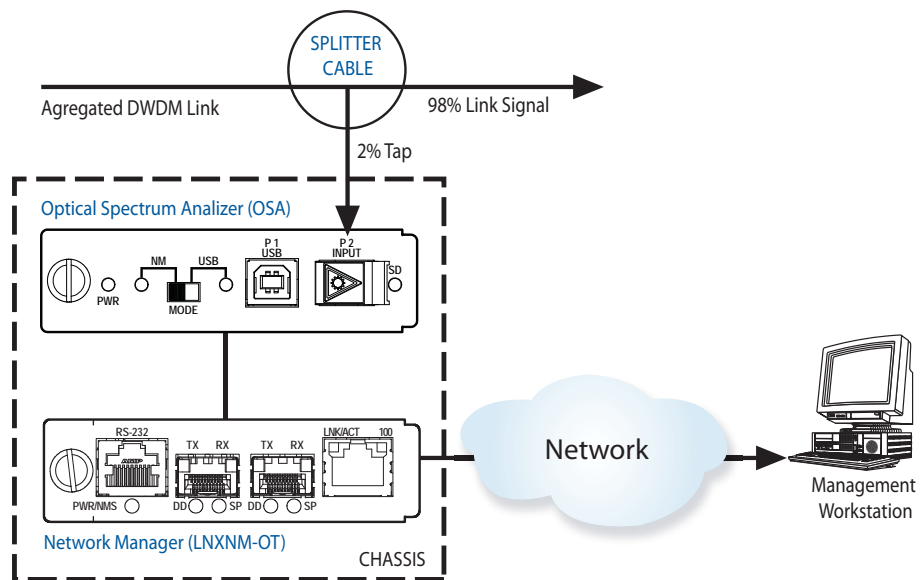



Datasheet

Optical Specifications

Wavelength Range	C-band (DWDM channels 21-60)
Number of Channels	40
Channel Spacing	100 GHz
Absolute Wavelength Accuracy	± 50 pm
Relative Wavelength Accuracy	30 pm
Input Power Range	- 60 to -10 dBm
Channel Power Accuracy	± 0.5 dB
Power Resolution	0.1 dB
PDL	0.3 dB
Response Time	<10 ms (raw data only)
OSNR	Minimum: 25 dB; Typical: 30 dB
OSNR Accuracy	± 2 dB

Physical Specifications

Operating Temperature:	-0°C to 50°C (32°F to 122°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Relative Humidity	85% maximum, non-condensing
Physical Dimensions (W x H x D)	25 mm x 75 mm x 175 mm deep (1" x 3" x 7" deep)
Approximate Weight	450 grams (16 oz)
Regulatory Compliance	FCC Part 15 (Class A); IC (Class A); EMC Directive: Emission (Class A) and Immunity; RoHS Directive; China RoHS; WEEE Directive

Ordering Information

Model	Description
EM316OSA-40DC21	Optical Spectrum Analyzer, DWDM, C-band (ITU channels 21-60)
10610054-0001R	Optical splitter cable, 98% and 2% signal outputs

MRV has more than 50 offices throughout the world. Addresses, phone numbers and fax numbers are listed at www.mrv.com. Please e-mail us at info@mrv.com or call us for assistance.

MRV Los Angeles
20415 Nordhoff Street
Chatsworth, CA 91311
800-338-5316
818-773-0900

MRV Boston
300 Apollo Drive
Chelmsford, MA 01824
800-338-5316
978-674-6800

MRV International
Business Park Moerfelden
Waldeckerstrasse 13
64546 Moerfelden-Walldorf
Germany
Tel. (49) 6105/2070
Fax (49) 6105/207-100

All statements, technical information, and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. Please contact MRV Communications for more information. MRV Communications and the MRV Communications logo are trademarks of MRV Communications, Inc. Other trademarks are the property of their respective holders.