


Datasheet

LambdaDriver® - 1+1 redundancy Module (EM800/EM1600-RED)

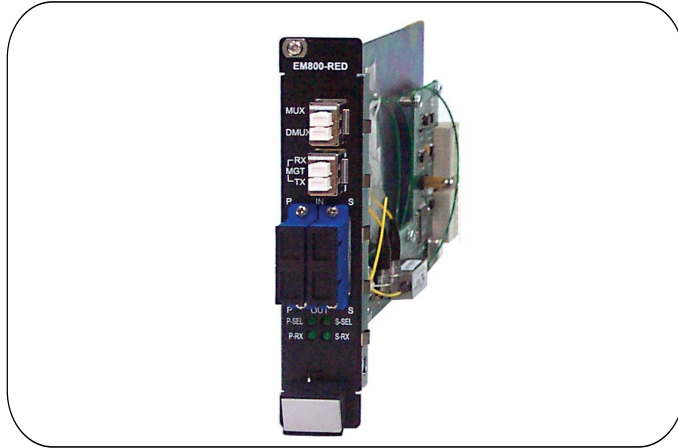

EM800-RED

Features

- Singlemode optical fiber connectivity
- Less than 25 ms link protection switchover
- Hot-swappable
- 1-slot size

Applications

- Point to point protection link
- DWDM, CWDM networks
- Any fiber optic link protection

Overview

Survivability of optical connections has grown into an issue of the greatest importance for WDM networks as well as for any other optical communication technology. The interruption of high-speed optical connection even for a few seconds means a huge waste of data information. Network operators have therefore to face their customer's requirements, which are very stringent as to outage periods.


One of the most popular protection techniques is 1+1 dedicated protection, also known as self-healing. The source node splits the signal into two identical copies transmitting them simultaneously on two separate light paths. The receiver node selects the signal with the best quality.

The 1+1 Redundancy module is part of the LambdaDriver® product line. The switchover time is lower than 25 ms, which is much better than the STM requirement of 50 ms. The switching is performed when the monitored link signal is below the pre-defined optical signal threshold.

The module is fully manageable by the LambdaDriver management module and can be accessed also by MegaVision® (MRV's web-based NMS) or any other SNMP manager. The module reports the current status of Primary/Secondary link to the management. The module can be switched over from Secondary to Primary and vice versa by a command from management.

There is an option for having Optical Supervisory Channel (OSC) included on the module. In this case, the module includes, besides the protection function, 1310/1550nm splitting/combination.

- There are two types of modules:
- EM800-RED – LD800 slot size
 - EM1600-RED – LD1600 long slot size

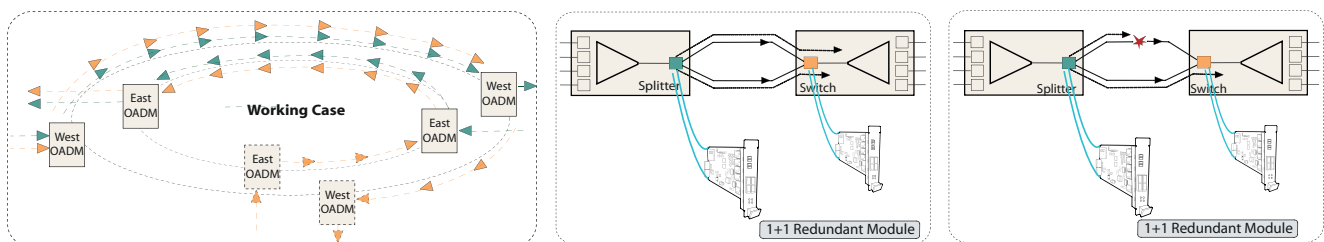

Link protected network operating with unbroken redundant link

Link protected network operating with broken redundant link

Environmental

Operating Temperature	- 5 to 45 °C
Storage Temperature	-10 to 70 °C
Relative Humidity	85% maximum, non-condensing
Dimensions (W x H x D)	EM800: W: 26.93 mm (1.06 in); H: 130.7 mm (5.145 in); D: 227 mm (8.956 in) EM1600: 26.93 mm (2.13 in); 263.4 mm (5.145 in); 227 mm (8.956 in)
Weight	EM800: 0.42kg (0.93 lb) EM1600: 0.84kg (1.85 lb)
Connector	Mux/DeMux section - MU Trunk – SC

Technical Specifications
Optical Specifications

Parameter	Value			Units
	Minimum	Typical	Maximum	
Wavelength Range	1270		1625	nm
Maximum insertion loss				
RED TX			3.5	dB
RX			2	
RED/NS TX			2.5	
RX			1	
Maximum link switchover time			25	ms
Power consumption	1 Watt			
Management				
Front panel LEDs	Primary/Secondary link status, Primary/Secondary link selection status			
Power Monitoring	Input power, Output power			
Alarm	Primary/Secondary link switchover			
Command	Primary/Secondary link switchover			

Order Info	EM800-RED	Redundant link module for LD800
	EM800-RED/NS	Redundant link module for LD800 without OSC
	EM1600-RED	Redundant link module for LD1600
	EM1600-RED/NS	Redundant link module for LD1600 without OSC

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. Please contact MRV Communications for more information. MRV Communications and the MRV Communications logo are trademarks of MRV Communications, Inc. Other trademarks are the property of their respective holders.