

## Datasheet

# 622 Mbps Single-Mode 48 km SFP Transceivers

SFP-O12D-LR1



### Highlights

- SFP transceiver
- Data Rates: 622 Mbps
- Protocols:
  - SDH STM-4
  - SONET OC-12
- Single-mode fiber
- 1310 nm
- 20 to 48 km
- Duplex LC connector
- Digital Diagnostics (SFF-8472)
- Hot-swap
- Industrial temperature models available

### Overview

Small Form-Factor Pluggable (SFP) interfaces from MRV Communications provide flexible high speed links in a small industry-standard package. They deliver the deployment options and inventory control that network administrators demand for growing networks.

SFPs are designed to Multi-Source Agreement (MSA) standards to ensure network equipment compatibility. They are a perfect addition to MRV's extensive lines of networking equipment.

Visit the MRV website at [www.mrv.com](http://www.mrv.com) or contact your nearest authorized MRV Communications dealer for more information.

### Specifications Overview

Data Rate	622 Mbps
Tx Wavelength	1310 nm
Tx Power (Minimum)	-3 dBm
Dispersion Penalty	1 dB
Tx Disable	Yes
Rx Wavelength Range	1200 - 1625 nm
Rx Sensitivity	-28 dBm
Rx Saturation	-8 dBm
Rx Damage Threshold	0 dBm
Operating Temperature Range	0 to 70 °C
Operating Temperature Range (TH Models)	-40 to 85 °C
Power Consumption	1 Watt

## Datasheet

### Transmitter Specifications, Optical

Parameter	Symbol	Minimum	Maximum	Unit	Note
Optical Power	$P_{OP}$	-3	2	dBm	-
Average Launch Power Of Off Tx	$P_{Off}$	-	-30	dBm	-
Extinction Ratio	ER	8.2	-	dB	-
Eye Mask	-	SONET/SDH compliant			-
Optical Jitter Generation	Jgen	-	0.002	UI	-
Optical Rise Time	$t_r$	-	500	ps	1
Optical Fall Time	$t_f$	-	500	ps	1
Mean Wavelength	$\lambda$	1296	1330	nm	-
Spectral Width (RMS)	$\Delta\lambda$	-	1.7	nm	-
Dispersion Penalty (at 40 Km)	-	-	1	dB	-
Relative Intensity Noise	RIN	-	-120	dB/Hz	-

Notes: 1. 20%-80% values

### Receiver Specifications, Optical

Parameter	Symbol	Minimum	Maximum	Unit	Note
Receive Power Low	$R_{sens,low}$	-	-28	dBm	1
Receive Power High	$R_{sens,high}$	-8	-	dBm	-
Damage Threshold for Receiver	$P_{in,damage}$	0	-	dBm	-
Wavelength	$\lambda$	1260	1360	nm	2
LOS Assert	$LOS_A$	-38	-	dBm	-
LOS De-Assert	$LOS_D$	-	-28	dBm	-
LOS Hysteresis	-	0.5	-	dB	-

Notes: 1.  $10^{-12}$  at nominal wavelength  
2. Operational over 1200 to 1625 nm range

### Monitoring Specifications

Parameter	Range	Accuracy	Unit	Calibration	Formula
Temperature	-5 to 70 °C	$\pm 3$	°C	Internal	$T_c(C) = T_{ad}(16 \text{ bit signed twos complement})/256$
Temperature (TH Models)	-40 to 85 °C	$\pm 3$	°C	Internal	$T_c(C) = T_{ad}(16 \text{ bit signed twos complement})/256$
Voltage	0 to $V_{CC}$	$\pm 0.1$	V	Internal	$V(\text{Volts}) = V_{ad}(16 \text{ bit unsigned integer}) * 0.1$
Bias Current	0 to 120	$\pm 5$	mA	External	$I(\text{mA}) = I_{slope} * I_{ad}(16 \text{ bit unsigned integer}) + I_{offset}$
Tx Power	-3 to 2	$\pm 3$	dBm	External	$TX\_PWR(\mu W) = TX\_PWR_{slope} * TX\_PWR_{ad}(16 \text{ bit unsigned integer}) + TX\_PWR_{offset}$
Rx Power	-28 to -8	$\pm 3$	dBm	External	$RX\_PWR(\mu W) = A0 + A1 * x + A2 * x^2 + A3 * x^3 + A4 * x^4$

### General Operations

Parameter	Symbol	Minimum	Maximum	Unit	Note
Supply Voltage	$V_{CC}$	3.135	3.465	V	-
Total Current	$I_{CC}$	-	300	mA	-
Power Supply Noise Rejection	PSR	100	-	$mV_{p-p}$	1
Operating Case Temperature	$T_{op}$	-5	70	°C	-
Operating Case Temperature (TH Models)	$T_{op}$	-40	85	°C	-
Storage Temperature	$T_{st}$	-40	85	°C	-
Data Rate OC-12/STM-4	DR	-	622	Mbps	-

Notes: 1. 20 Hz to 155 MHz

## Datasheet

### Transmitter Specifications, Electrical

Parameter	Symbol	Minimum	Maximum	Unit	Note
Input Differential Impedence	$R_{in}$	80	120	$\Omega$	-
PECL Single Ended Data Input Swing	$V_{in,p-p}$	250	1200	mV	-
TxFault_Fault	$V_{fault}$	2	$V_{cc}$	V	-
TxFault_Normal	$V_{normal}$	$V_{ee}$	$V_{ee}+0.5$	V	-
TxDisable_Disable	$V_d$	2	$V_{cc}$	V	-
TxDisable_Enable	$V_{en}$	$V_{ee}$	$V_{ee}+0.8$	V	-

### Electrical Output

Parameter	Symbol	Minimum	Maximum	Unit	Note
PECL Single Ended Data Output Swing	$V_{out,p-p}$	185	800	mV	-
Data Output Rise Time	$t_r$	-	500	ps	-
Data Output Fall Time	$t_f$	-	500	ps	-

### Timing and Electrical


Parameter	Symbol	Minimum	Maximum	Unit	Note
Tx Disable Negate Time	$t_{on}$	-	1	ms	-
Tx Disable Assert Time	$t_{off}$	-	10	$\mu s$	-
Time To Initialize, Including Reset Of Tx Fault	$t_{init}$	-	300	ms	-
Tx Fault Assert Time	$t_{fault}$	-	100	$\mu s$	-
Tx Disable To Reset	$t_{reset}$	10	-	$\mu s$	-
Los Assert Time	$t_{loss\_on}$	-	100	$\mu s$	-
Los De-assert Time	$t_{loss\_off}$	-	100	$\mu s$	-
Serial ID Clock Rate	$f_{serial\_clock}$	-	100	KHz	-
RX_LOS Voltage (High)	-	2	-	V	-
RX_LOS Voltage (Low)	-	-	0.8	V	-
LOS Output Voltage-Fault	$V_{LOSfault}$	2	$V_{cc}$	V	-
LOS Output Voltage-Normal	$V_{LOSnormal}$	$V_{ee}$	$V_{ee}+0.5$	V	-
MOD_DEF (0:2)-High	$V_h$	2	$V_{cc}$	V	-
MOD_DEF (0:2)-LOW	$V_l$	$V_{ee}$	$V_{ee}+0.5$	V	-

## Datasheet

### Pin Descriptions

Pin	Function	Name/Description
1	V <sub>ee</sub> T	Transmitter Ground
2	Tx_Fault	Open Collector
3	Tx_Disable	Internally Pulled High
4	MOD_DEF(2)	Serial Data Input
5	MOD_DEF(1)	Serial Clock Input
6	MOD_DEF(0)	Internally Grounded
7	NC	Not Connected
8	LOS	Open Collector
9	V <sub>ee</sub> R	Receiver Ground
10	V <sub>ee</sub> R	Receiver Ground
11	V <sub>ee</sub> R	Receiver Ground
12	RXD-	Receiver Data Negative
13	RXD+	Receiver Data Positive
14	V <sub>ee</sub> R	Receiver Ground
15	V <sub>cc</sub> R	Receiver Power
16	V <sub>cc</sub> T	Transmitter Power
17	V <sub>ee</sub> T	Transmitter Ground
18	TXD+	Transmitter Data Positive
19	TXD-	Transmitter Data Negative
20	V <sub>ee</sub> T	Transmitter Ground

### Mechanical Dimensions

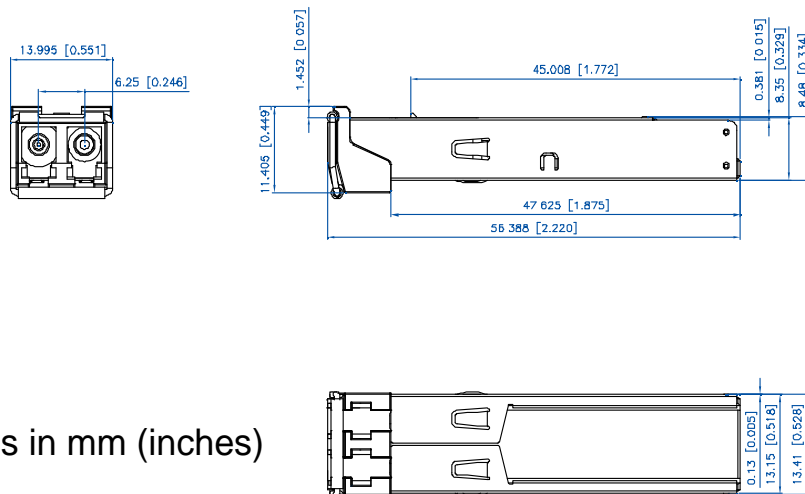



## Datasheet

### Ordering Information

Model	Description	Data Rate (Mbps)	Wavelength (nm)	Connector	Bail Latch Color	Digital Diagnostics	Maximum Distance Range (km)*
SFP-O12D-LR1	SDH STM-4, SONET OC-12 SFP Transceiver	622	1310	Duplex LC	Red	Yes	20 - 48
SFP-O12D-LR1TH	SDH STM-4, SONET OC-12 SFP Transceiver, <i>Temperature Hardened</i>	622	1310	Duplex LC	Red	Yes	20 - 48

\* Maximum range quoted is not possible with all wavelength and/or fiber. Please consult MRV.

### Regulatory and Industry Compliances

Class 1 Laser Product, complies with EN 60825-1 and 21 CFR 1040.10 except for deviations pursuant to Laser Notice No. 50. dated June 24, 2007  
MSA SFF-8074i; Digital Diagnostic SFF-8472  
Certified by one or more of the following agencies: TÜV, UL, CSA  
RoHS Directive; China RoHS; California RoHS Law, REACH Directive SVHC; WEEE Directive  
The Quality Management System is certified to ISO 9001 by QMI-SAI Global  
The Environmental Management System is in compliance with ISO 14001

### Warnings

**Handling Precautions:** This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

**Laser Safety:** Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

MRV has more than 50 offices throughout the world. Addresses, phone numbers and fax numbers are listed at [www.mrv.com](http://www.mrv.com).  
Please e-mail us at [info@mrv.com](mailto:info@mrv.com) or call us for assistance.

MRV Los Angeles  
20415 Nordhoff Street  
Chatsworth, CA 91311  
800-338-5316  
818-773-0900

MRV Boston  
300 Apollo Drive  
Chelmsford, MA 01824  
800-338-5316  
978-674-6800

MRV International  
Business Park Moerfelden  
Waldeckerstrasse 13  
64546 Moerfelden-Walldorf  
Germany  
Tel. (49) 6105/2070  
Fax (49) 6105/207-100

All statements, technical information, and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. Please contact MRV Communications for more information. MRV Communications and the MRV Communications logo are trademarks of MRV Communications, Inc. Other trademarks are the property of their respective holders.